

## MT-364011/S/A

# 2.5-2.7 GHz 16.5 dBi Dual Pol. Subscriber Antenna




### Specifications


MTI PART NUMBER		MT - 364011/S/A			
<b>ELECTRICAL</b>					
REGULATORY COMPLIANCE	ETSI EN 301 525 V1.1.1 (2006-06)				
FREQUENCY RANGE	2.5-2.7 GHz				
GAIN	16.5 dBi (min), 17 dBi (typ)				
VSWR	1.5 : 1 (min) , 2.0:1 (max)				
3 dB BEAMWIDTH	20°(typ)				
POLARIZATION	Dual Vertical and Horizontal				
SIDELobe LEVEL	ETSI EN 301 525 V1.1.1 TS1-TS3				
CROSS POLARIZATION	ETSI EN 301 525 V1.1.1 TS1-TS3 -20 dB (max), -25 dB (nom)				
PORT TO PORT ISOLATION	25 dB (max)				
F/B RATIO	-30dB (max)				
INPUT IMPEDANCE	50 (ohm)				
INPUT POWER	6W (max)				
LIGHTNING PROTECTION	DC Grounded				
FIRST SIDE LOBE	-14.5 dB (max) , -18 dB (typ)				
<b>MECHANICAL</b>					
DIMENSIONS (LxWxD)	340x340x30mm (max)				
WEIGHT	1.6kg (max)				
CONNECTOR	Two SMA Female				
RADOME	Plastic				
BASE PLATE	Aluminum with chemical conversion coating				
OUTLINE DRAWING	See page 2				
MOUNTING KIT	MT-120018				
<b>ENVIRONMENTAL</b>					
TEST	STANDARD	DURATION	TEMPERATURE	NOTES	
LOW TEMPERATURE	IEC 68-2-1	72 h	-55°C	-	
HIGH TEMPERATURE	IEC 68-2-2	72 h	+71°C	-	
TEMP. CYCLE	IEC 68-2-14	1 h	-45°C +70°C	3 Cycles	
VIBRATION	IEC 60721-3-4	30 min/axis	-	Random4M3	
MECHANICAL SHOCK	IEC 60721-3-4	-	-	4M3	
HUMIDITY	ETSI EN300-2-4 T4.1E	144 h	-	95%	
WATER TIGHTNESS	IEC 529	-	-	IP67	
SOLAR RADIATION	ASTAM G53	1000 h	-	-	
FLAMMABILITY	UL 94	-	-	Class HB	
SALT SPRAY	IEC 68-2-11 Ka	500 h	-	-	
ICE AND SNOW	-	-	-	25mm Radial	
WIND SPEED	SURVIVAL	-	-	220 Km/h	
	OPERATION	-	-	160 Km/h	
WIND LOAD (SURVIVAL)	FRONT TRHRUST	-	-	33.3 kg	
	SIDE TRHRUST	-	-	2.9 kg	

## 2.5-2.7 GHz 16.5 dBi Dual Pol. Subscriber Antenna

Azimuth Radiation Pattern  
 Midband Freq. 2.6 GHz

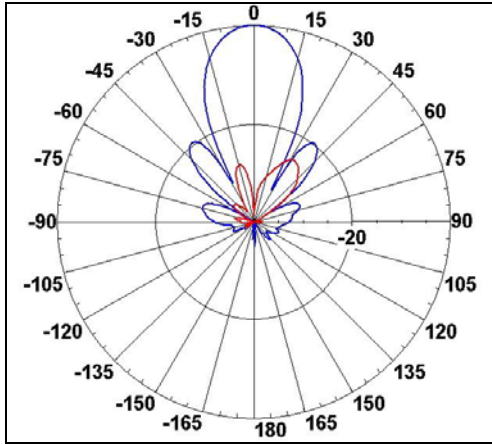

Elevation Radiation Pattern  
 Midband Freq. 2.6 GHz

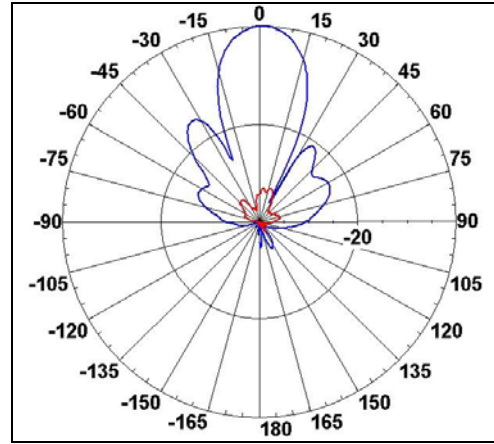

### Dimensions [mm]

### Existing Antenna Versions


MTI Wireless Edge is certified according to ISO 9001 and ISO 14001.

**WAIVER!**

While the information contained in this document has been carefully compiled to the best of our present knowledge, it is not intended as presentation or warranty of any kind on our part regarding the fitness of the products concerned for any particular use or purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The fitness of each product for any particular purpose must be checked beforehand with our specialists.

**MTI Wireless Edge Ltd.**

11 Hamelacha St.  
 Afek Industrial Park  
 Rosh Ha'ayin 48091, Israel  
 Tel: +972-3-9008900  
 Fax: +972-3-9008901  
[www.mtiwe.com](http://www.mtiwe.com)